



Technical Specifications

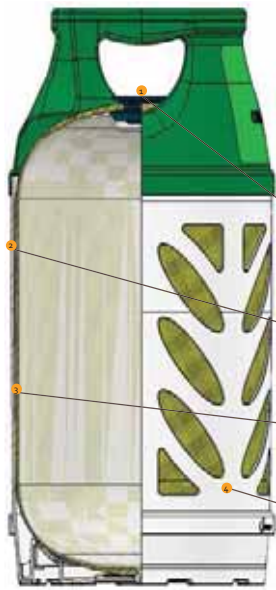

- Integrated Boss for valve connection. Brass insert with injection molded polyethylene (HD). Welded to liner
- Fiberglass Composite layer
Filament wound and UV Surface coated
- Polyethylene (HD) Liner
Blow molded
- Polyethylene (HD) outer casing
Injection molded in three parts

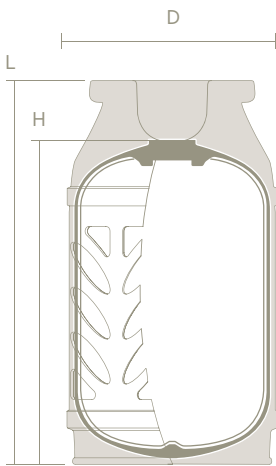

Propane capacity	11.0 lbs	17.0 lbs	22.0 lbs	31.0 lbs
Butane capacity	13.2 lbs	18.7 lbs	26.0 lbs	37.0 lbs
Water capacity	27.5 lbs	40.4 lbs	53.0 lbs	75.0 lbs
Overall Length (L)	15.24 in	18.1 in	22.5 in	28.3 in
Height to top of boss (H)	11.84 in	14.4 in	19.1 in	24.8 in
Diameter (D)	12.0 in	12.0 in	12.0 in	12.0 in
Tare weight (ex valve)	7.48 lbs	9.0 lbs	11.0 lbs	16.5 lbs

All cylinder sizes/versions can be supplied with M26 x 1,5 or M34 x 1,5 thread for valve connection

Pressure ratings	Service pressure	Test pressure	Required burst pressure	Ragasco burst pressure
	294 psi	441 psi	882 psi	2200 psi



8151 Blaikie Court, Sarasota, Florida 34240
Tel: 800-823-6677 eMail: sales@RagascoUSA.com



The best choice is clear.

Clear View LP Gas Tanks are distributed exclusively by Ragasco USA and made by Ragasco AS in its high-volume production facility in Raufoss Norway. Ragasco USA and Ragasco AS are committed to quality, safety and innovative solutions that provide value to our customers and preserves our environment.